AXOR

ShowerSelect

Valve for concealed installation for 3 functionsSurfaces: Brushed Black ChromeArticle Number: 15764340



<u>hansgr</u>ohe


Description

product features

- · 3 functions
- · simultaneous use of several outlets
- · maximum flow rate at 3 bar: 30 l/min
- · flow rate upper outlet: 26 l/min
- · Flow rate left and right: 29 l/min
- · flow rate by simultaneous use of all outlets: 30 l/min
- · Start/stop valve to operate the functions
- · connection type: basic set
- valve is delivered with buttons Rain large, Rain small and hand shower





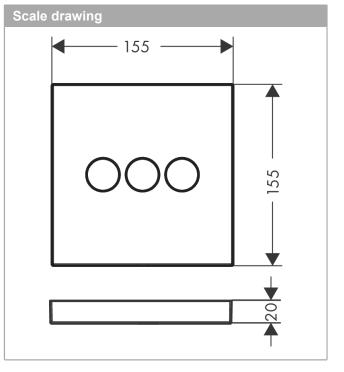

Flowchart 0,60 5.0 ① Outlet 1 0,55 5,5 ② Outlet 2 0,50 5,0 ③ Outlet 3 0,45 4,5 0,40 4,0 0.35 3.5 MPa 0,30 3,0 ğ 0.25 2.5 0,20 2,0 0.15 1,5 0.10 1,0 0,05 0,5 0,00 0,0 Q = I/min 0 Q = I/sec 0 6 12 18 24 30 36 42 48 0,2 0,4 0,6 0,8

AXOR

ShowerSelect

Valve for concealed installation for 3 functions Surfaces: Brushed Black Chrome Article Number: 15764340





